




SPC FLOORING

STONE POLYMER COMPOSITE

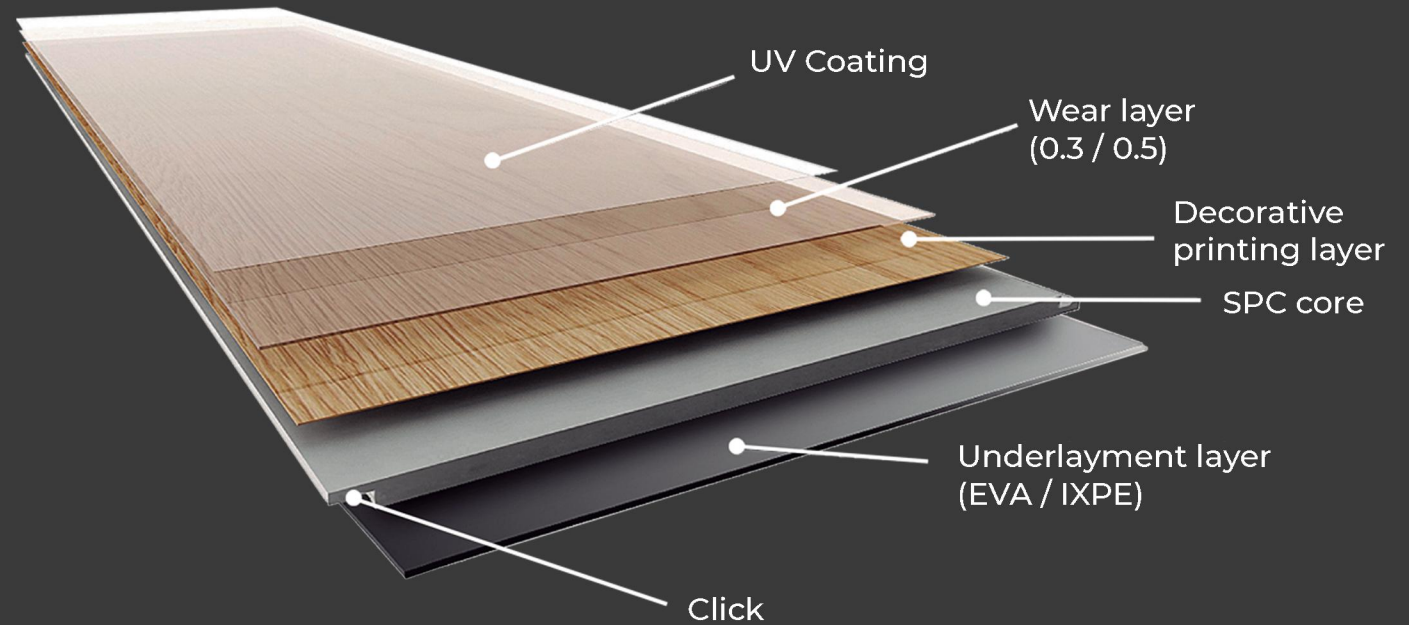

Waterproof



Different sizes



super durable abrasion



Dimensional stability



Domestic and medium commercial use



Easy to install



Optional bevel



Click system

SPC FLOORING

stone polymer composite

CARBON



COCO OAK



MASSY OAK



SMOKE



WELLINGTON OAK



WHITE OAK



GREY WASH OAK



LUME OAK



WALNUT OAK



MEDORA



BLACKBUTT



CLASSIC OAK



HICKORY OAK



POM



RATJ



RUSSIAN OAK



VIC




WOODLAND OAK




CANADIAN GREY



ASH

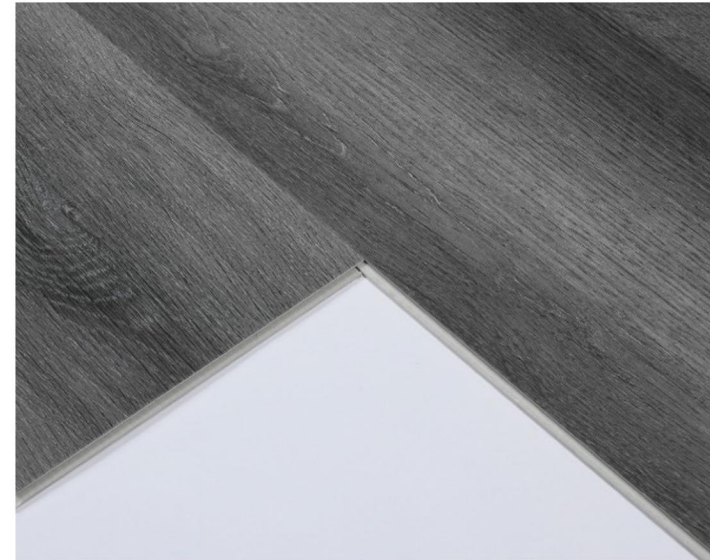

ATAKE

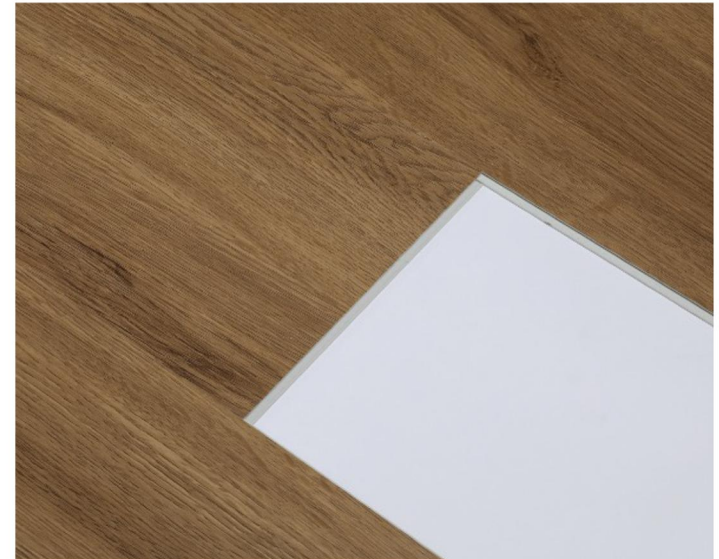

BENJI






BLOCK




CAPY



CARAM

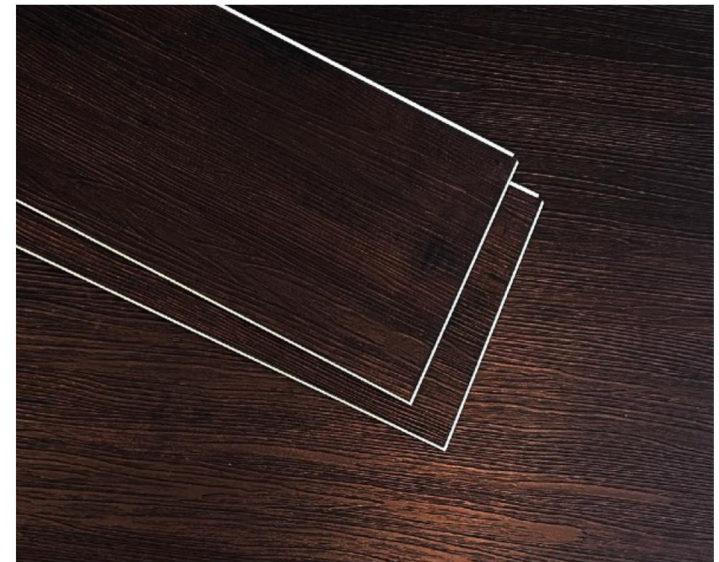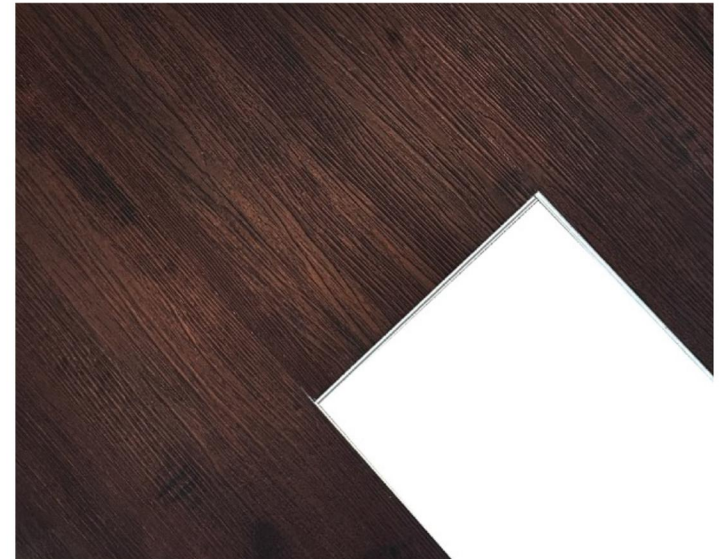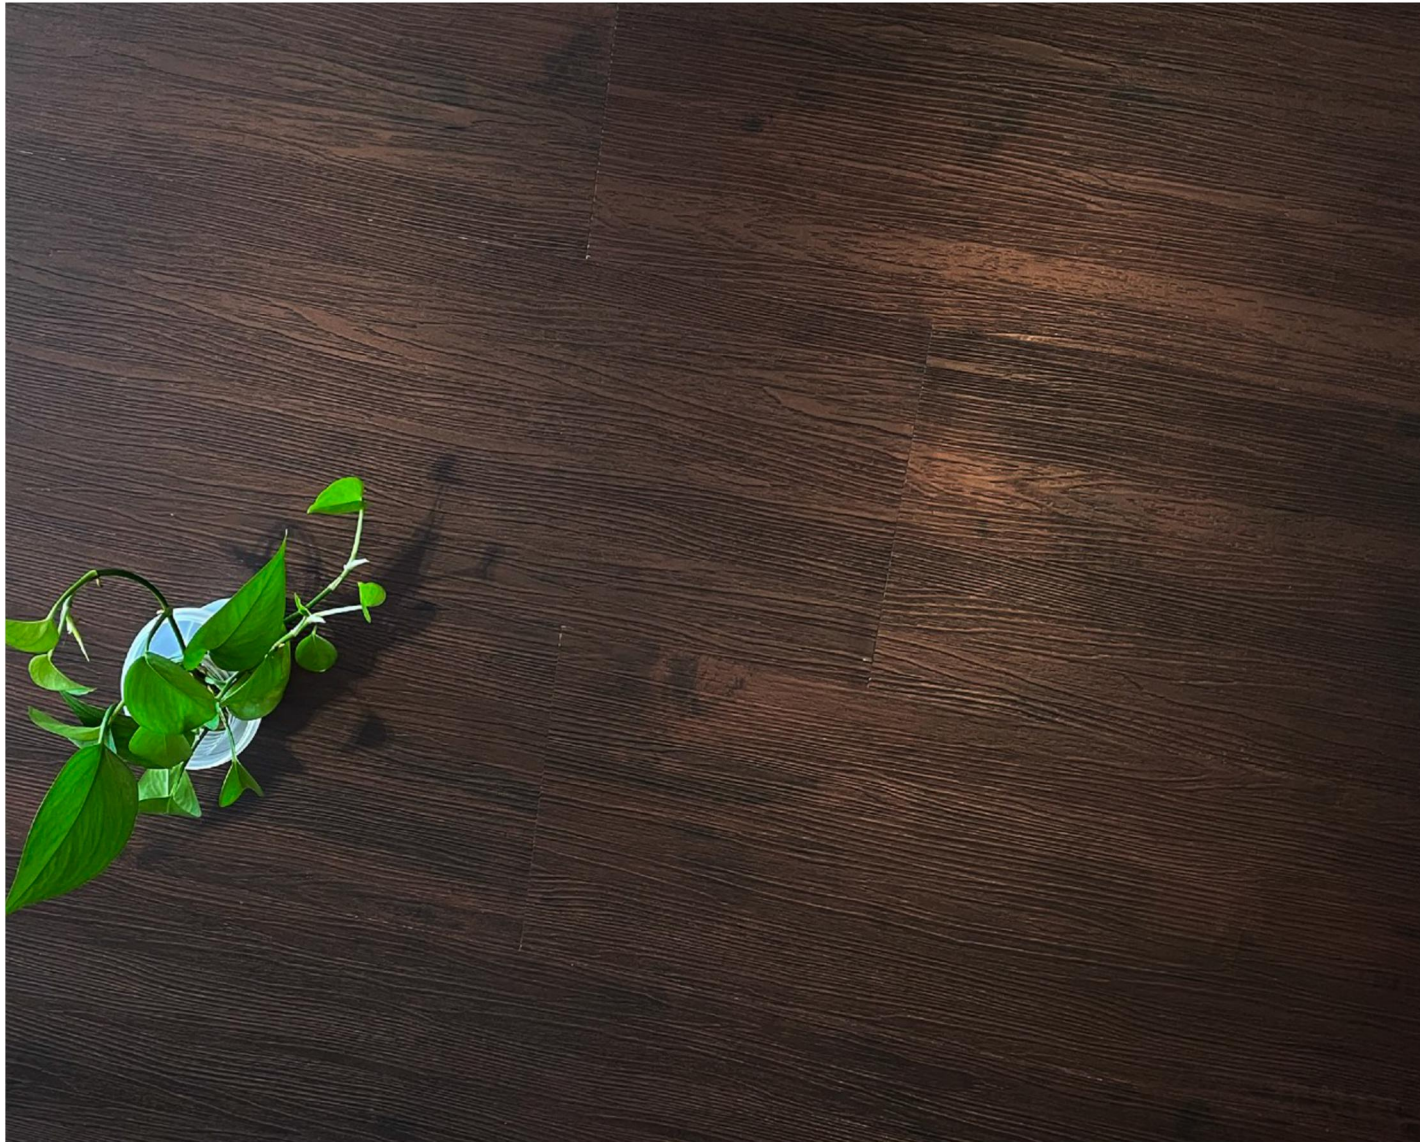


FAME

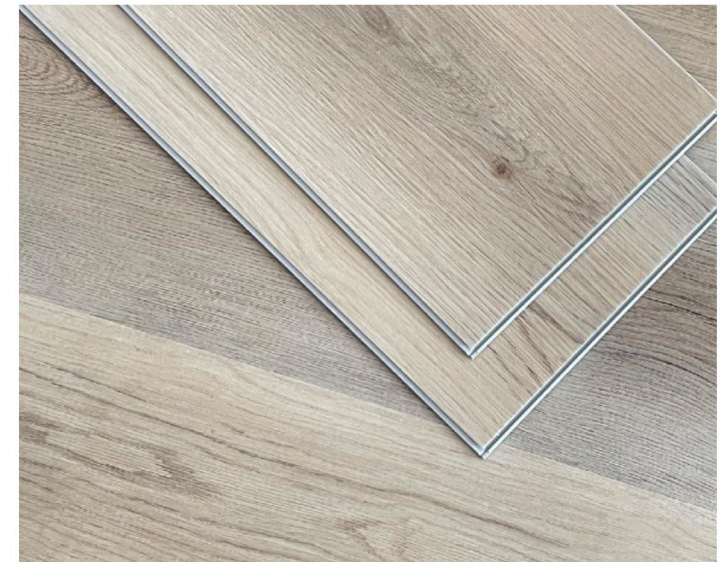



FERN




HESTON

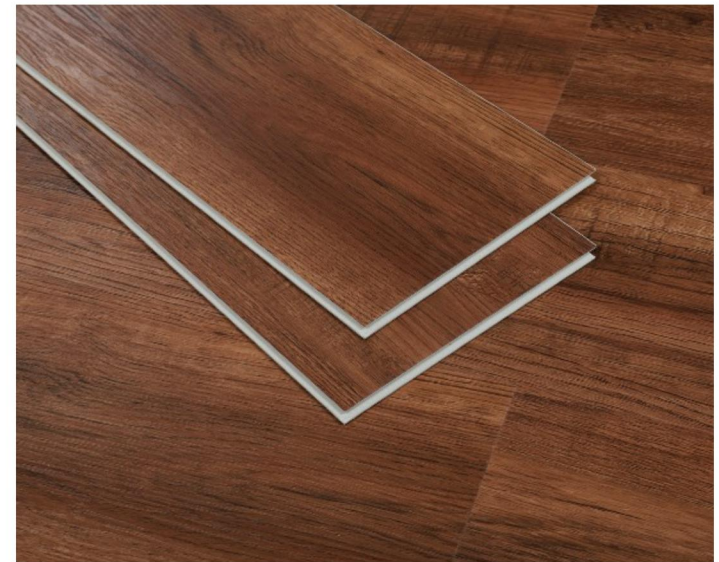


KAJA

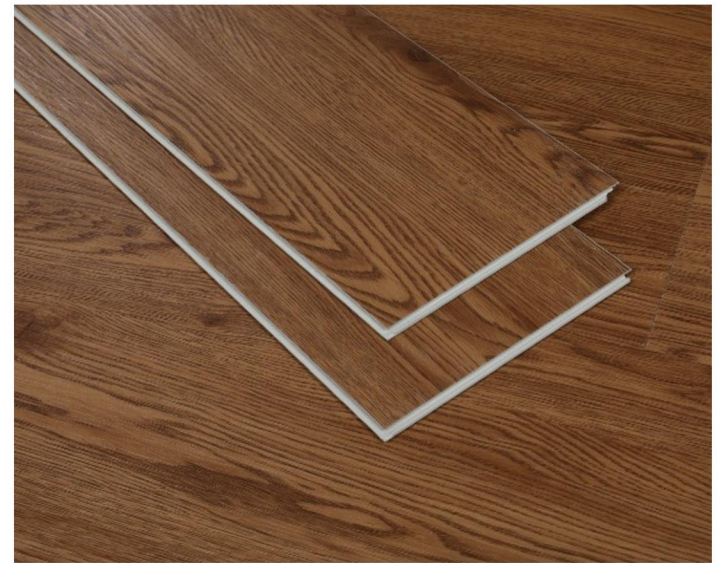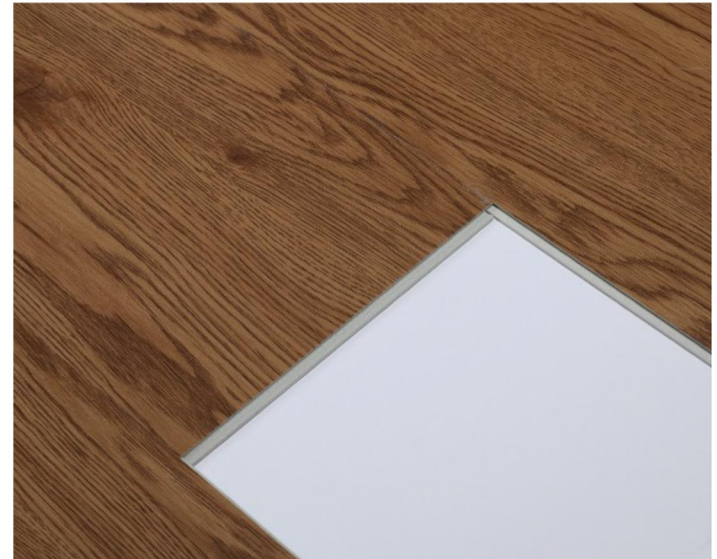

MAFI

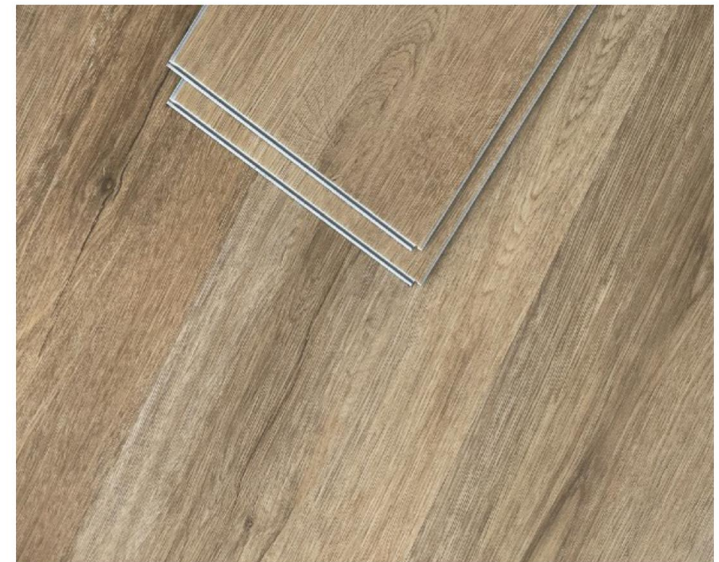

MIT

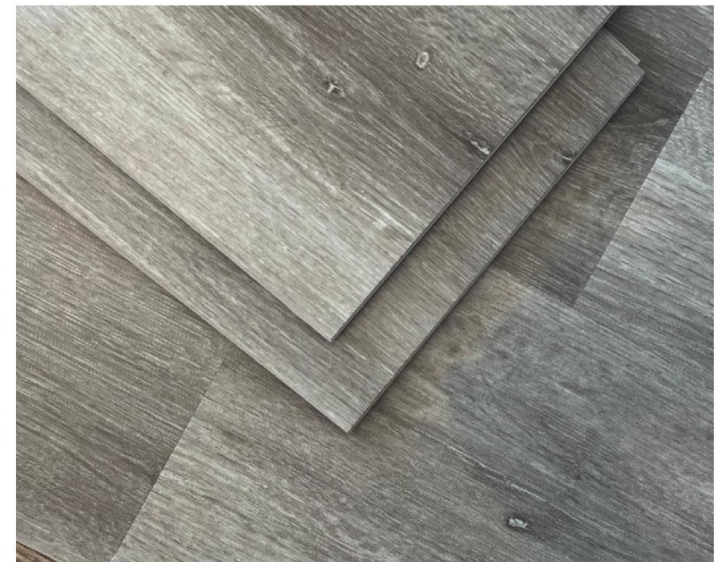



OLDTOWN



PINO




REDDISH

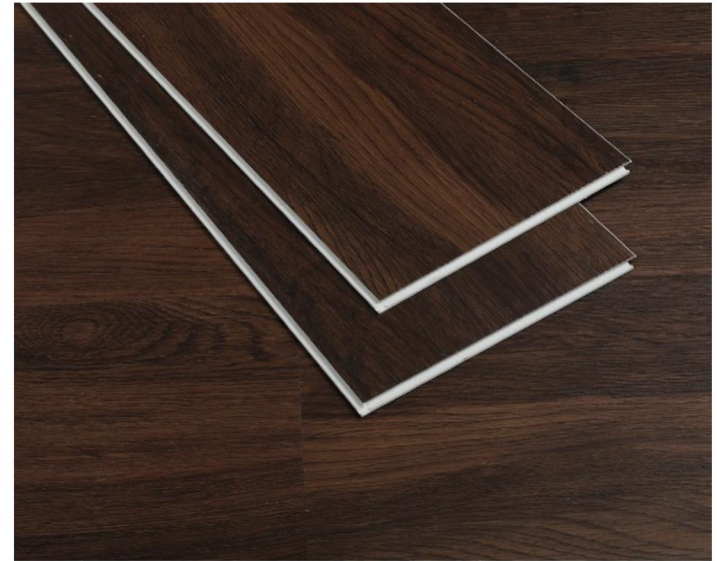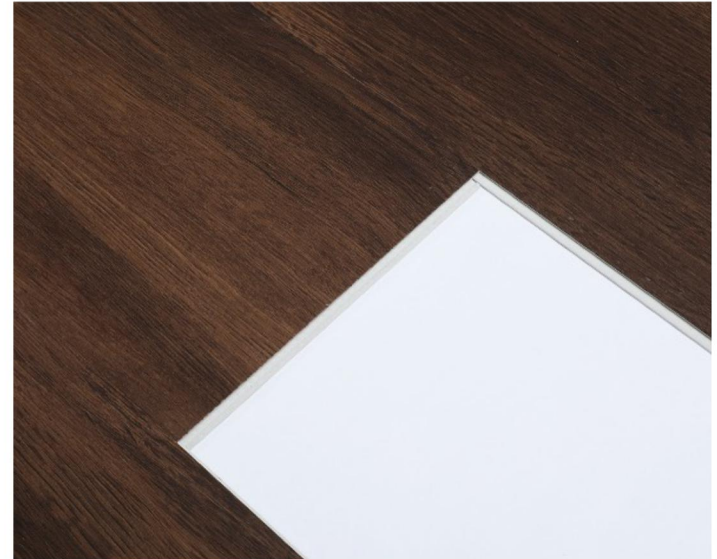

RIA



RUMY

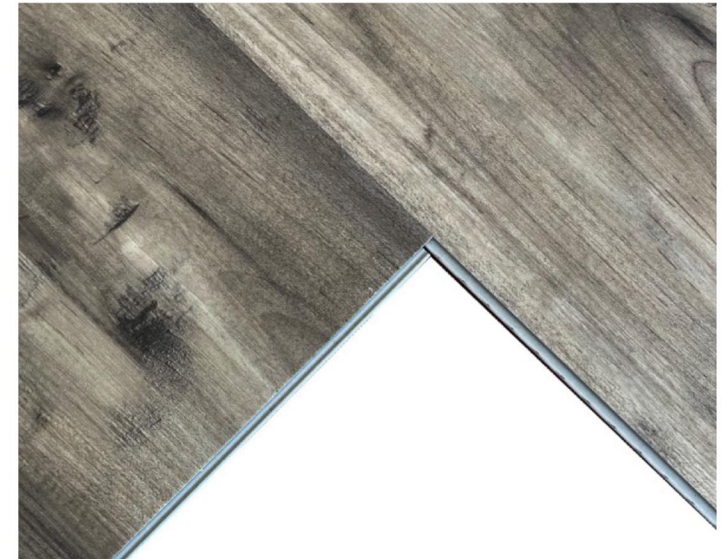

SAND




SEYA




SILVER



TEAM OAK

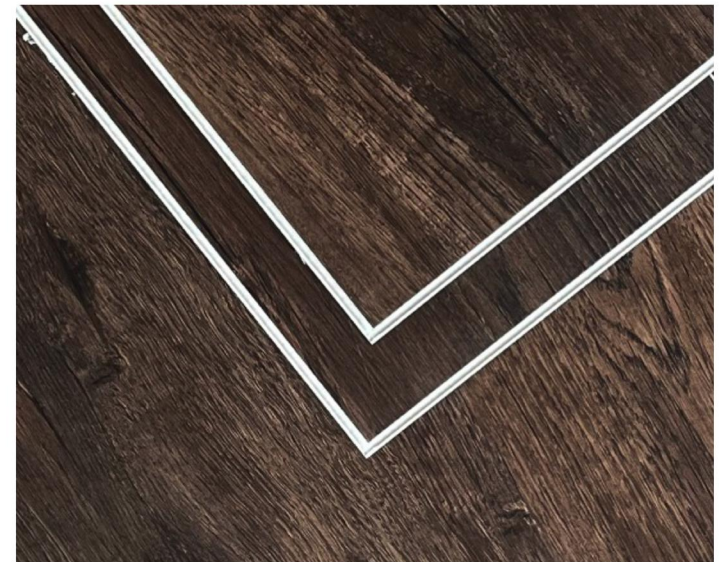



TONYI

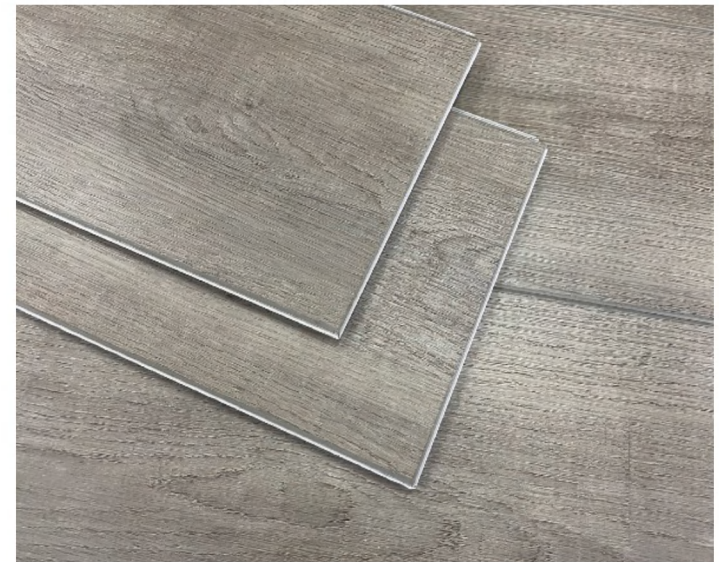

TOW



CARPET

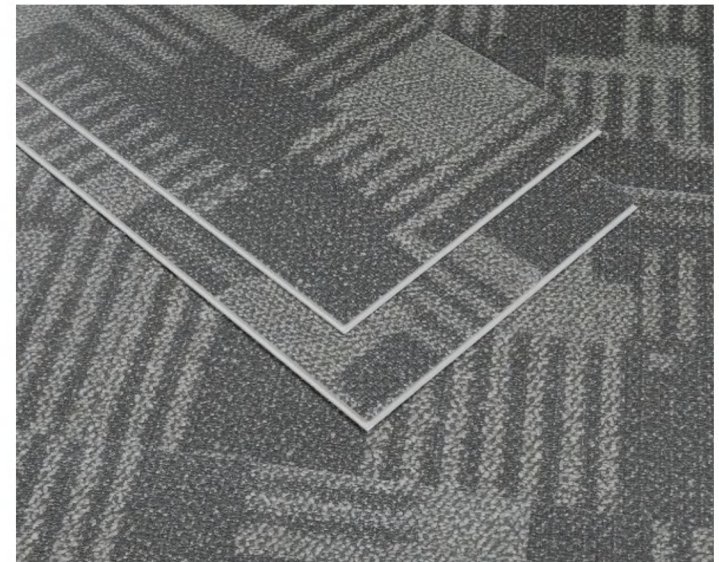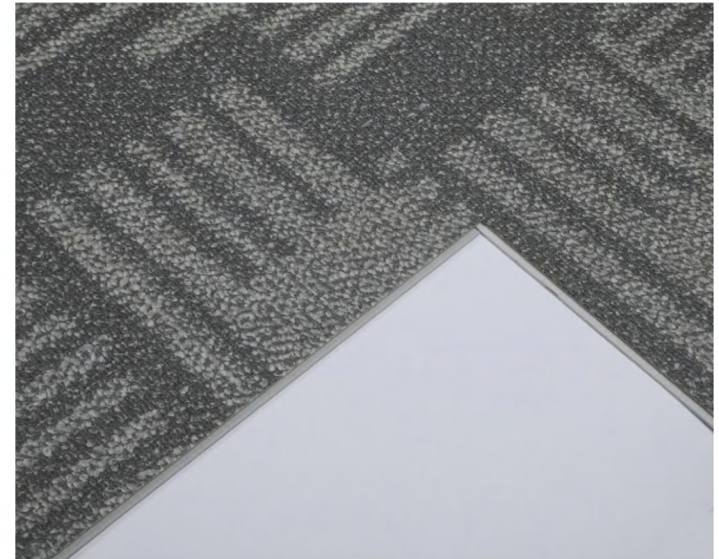


FABRIC




PIZARRA



ONICE G

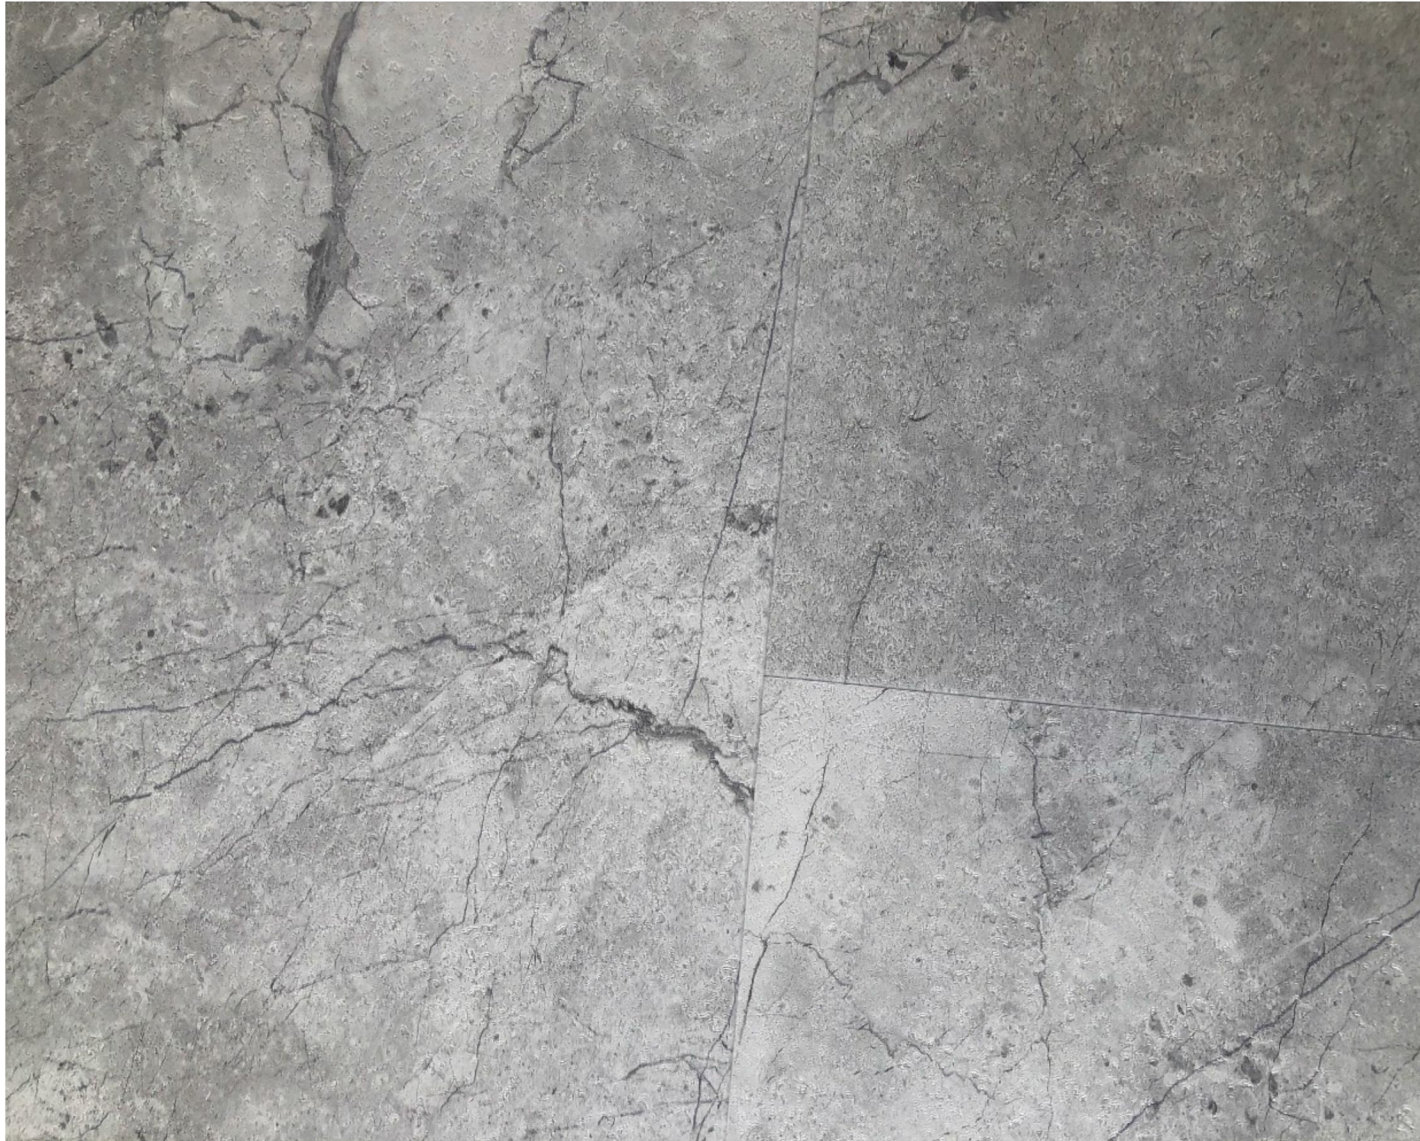

MARBLE W

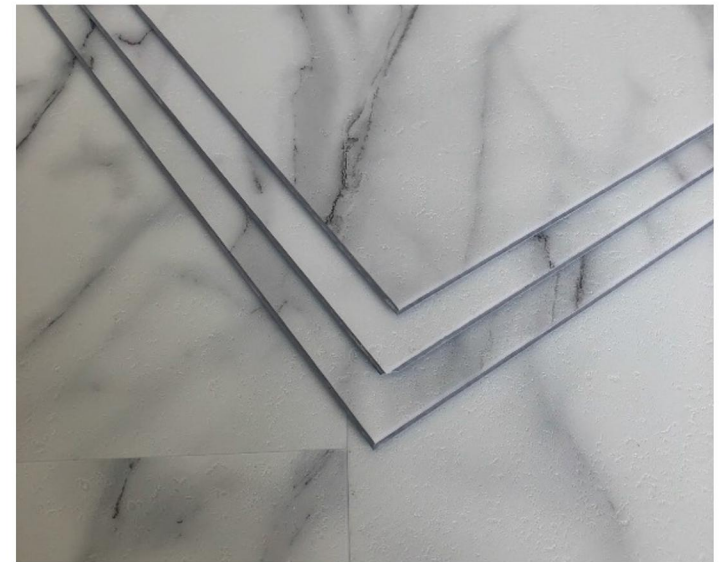



SPC FLOORING

STONE POLYMER COMPOSITE

SPC FLOORING

stone polymer composite

IMPORTANT NOTICE

The reproduction of the colors is approximated. All Flooring by QUALITY ENGINEERING reserves the right to alter or amend the products here stated. Price codes and product codes should be checked.

CAUTION : READ BEFORE INSTALLATION

Disclaimer on tiles: SPC may have variations in color, shiny effect and smoothness. These variations are affected by light and brightness. No claims will be accepted due to these changes in surface appearance. Due to the delicate nature of these products, we do not recommend the application of strong cleaning products, solvents, polishing, or buffing to the tile. BEFORE INSTALLATION, we recommend the inspection of all tiles. No claims will be accepted after the tiles have been installed.



TECHNICAL DATA

Physical properties	Specification 0.3 mm	Specification 0.5 mm
Plank Length	1220 mm	1220 mm
Plank Width	180 mm	180 mm
Finish	UV coating	UV coating
Wear layer	0.3mm/12mil	0.5mm/20mil
Recommended Usage	Residential and Commercial	Residential and Commercial
Installation Method	Glueless Floating	Glueless Floating

Technical properties	Specification 0.3 mm	Specification 0.5 mm
Total Thickness (ISO 23346:2006)	Pass	Pass
Dimensional Stability	≤0.15%	≤0.15%
Residual Indentation(ASTM F1914-07)	≤0.1%	≤0.1%
Behaviour to fire (EN13501-1) Bfl-S1	Bfl-S1	Bfl-S1
Slip Resistance	R10	R10
Castor Chair Suitability(EN425) Pass	Pass	Pass
VOC Emission(EN ISO 16000-06)	A+	A+
Phthalate Free(EN 14372:2004)	Pass	Pass
PCP Pentachlorophenol(DIN CEN/TS 14494:2003)	Pass	Pass
Recommended Usage	Class 23	Class 33
Use in Wet Areas	Yes	Yes
Underfloor Heating Suitability(EN1264-2)	Suitable,max 27°C/81°F	Suitable,max 27°C/81°F
Impact Resistance(EN13329)	Big Ball ≥1000mm	Big Ball ≥1000mm

PACKING

Size	Thickness (mm)	Kg / Pc (Kgs)	Pcs / Ctn	G.W / Ctn (Kgs)	Ctns / Plt	Plts / 20Gp	G.W / 20GP (Kgs)	Sq.m / 20GP	REMARK
7"x48" (inch) 180x1220 (mm)	4	1,9	10	19	70	20	26.500	3.075	1,5mm underlay

